


PRODUCT DESCRIPTION:

MSF Masonry Reinforcement, also known as Brickspan, or Bed Joint Reinforcement is primarily used to strengthen walls. Stainless Steel can be used on both inner and external bricks/blocks whereas galvanised is more suited to internal walls. Our Masonry Reinforcement aids to reduce cracking and proves general support.

Our reinforcement comes at a standard length of 2.7 metres, and is available in a range of wire diameters making our range versatile, and able to fit any combination of brick or block width.

Available in both Stainless and Galvanised, including 3.0mm, 3.5mm, 4.0mm and 5.0mm (or equivalent after being flattened). Usually packed and shipped in packs of either 40 lengths, or 20 lengths (depending on the weight and size of the reinforcement), however orders are not tied to these figures, and any amount can be ordered

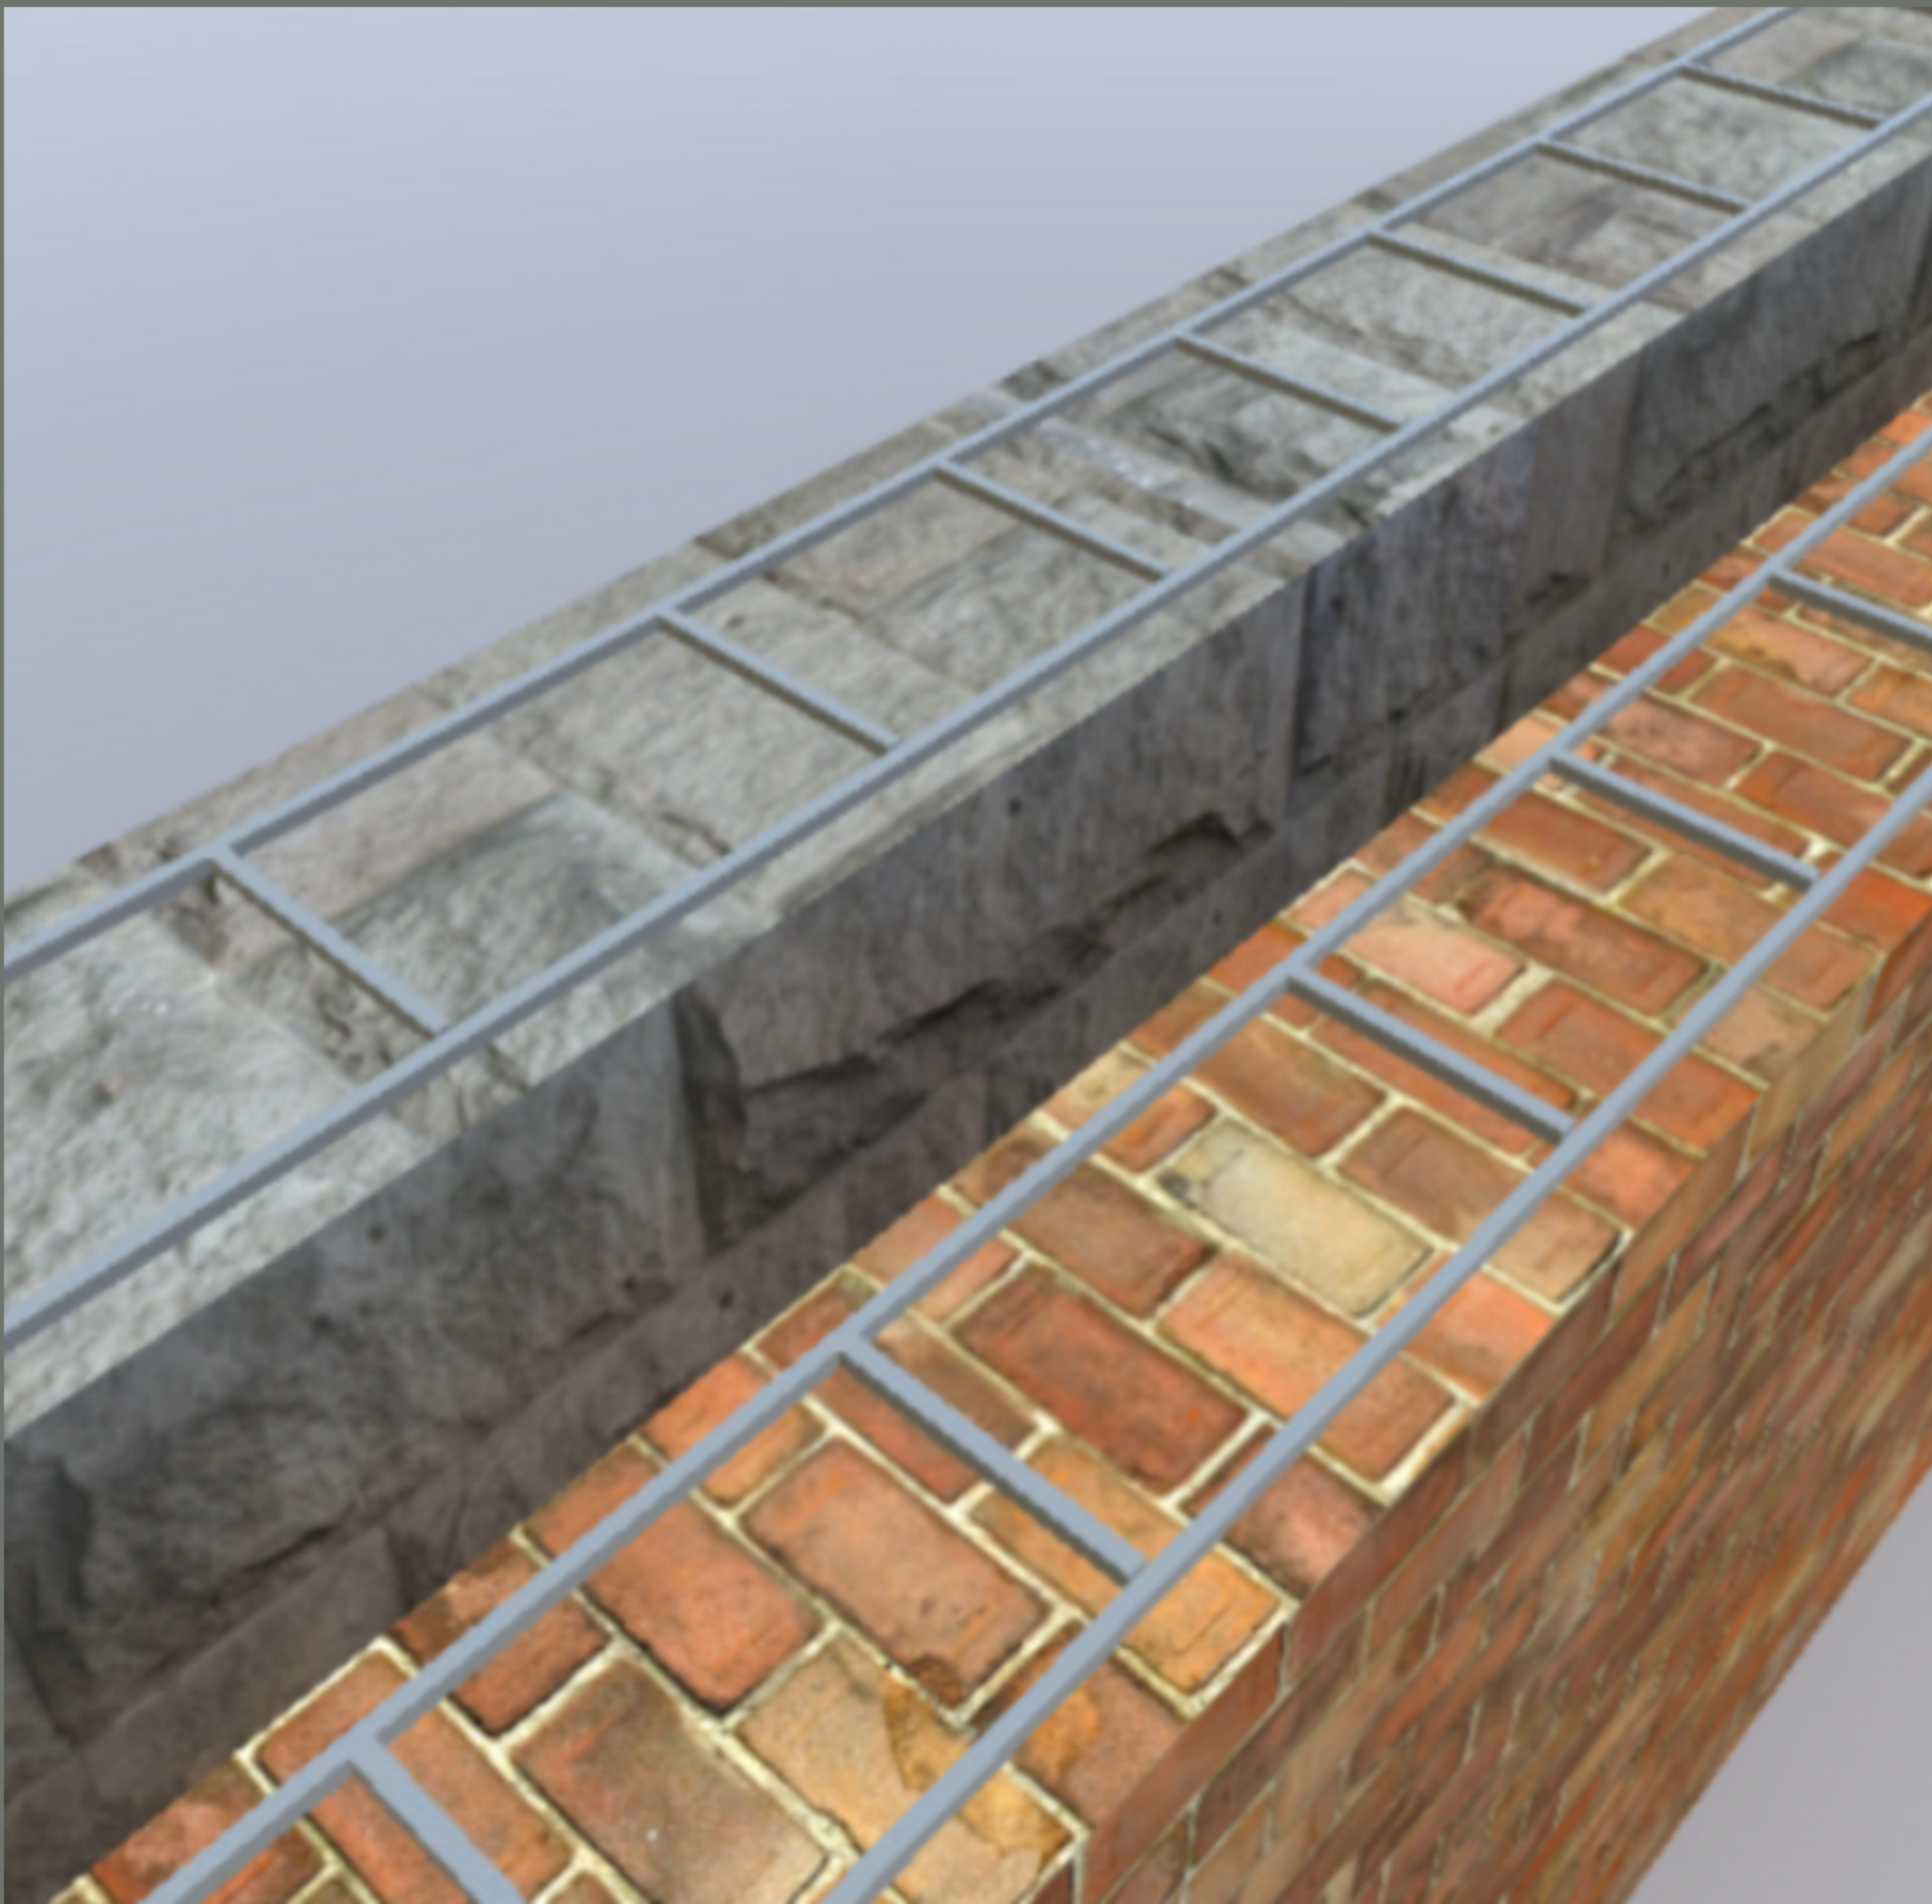

CE MARKING AND PRODUCT DIMENSIONS:

BRICKSPAN BED JOINT REINFORCEMENT -
MSF/SBS30W60: BS EN 845-3+A1

Characteristic Yield Strength of Longitudinal Wires:
500N/mm²

Minimum Tensile Stress: 15% Greater Than Yield Stress

Cross Section Area of Wire: 12.56mm² (Per Wire)

Ductility of Longitudinal Wires: Normal

Bond Strength: 6240N

Lap Length: 225mm (to include at least one cross wire)

Durability/Material Coating Reference: R3 (Stainless Steel)

Dangerous Substances: None



DECLARATION OF PERFORMANCE:

Manufactured By:
Mesh Supplies & Fabrications Ltd, Unit B2 Bentley Avenue,
Cowpen Lane Industrial Estate, Billingham, TS23 4BU

Intended Use:
For structural use within walls and partitions.

Notified Body:
CERAM Research Limited, Queens Road, Penkhull, Stoke
On Trent, ST4 7LQ

Notified Body Number:
1289

This Product conforms to System 3 - Assesment Verificia-
tion of Constancy of Performance. All necessary testing
was conducted at the above notified body.

PRODUCT COMPATABILITY:

In addition to the stock sizes below we are able to manu-
facture widths to suit any block or brick sizes. We can also
manufacture special shapes including 'T' sections and
corner pieces.

Wall Thickness	Brickspan Width
102mm Brick 100mm or 125mm Blockwork	60mm
140mm or 150mm Blockwork	100mm
190mm or 200mm Blockwork	150mm
215mm Blockwork	175mm

ADVANTAGES OF MSF MASONRY REINFORCEMENT:

- 2700mm lengths reduce the required amount of laps.
- We can supply lengths in any required width or amount, regardless of pack quantity.
- A 20mm cover on each side, allowing for site tolerance (with code stating a minimum of 15mm).

FOR MORE INFORMATION ON ANY OF OUR PRODUCTS CONTACT US ON:

01642 370 777 OR GO TO WWW.MESH-SUPPLIES.CO.UK